Standard 80 mm gauges, ex stock available

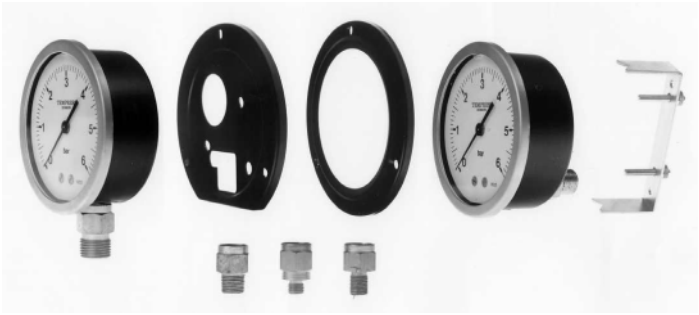

Refrigeration Pressure Gauges

- Diameters 63, 80, 100 or 160 mm
- Liquid filled
- Bottom or rear connection
- Direct, wall or panel mounting
- Vibration protected
- Long term stable
- Many different refrigeration scales

Surface mounting with bottom connection, diameter 80 mm

Type 80M10-1

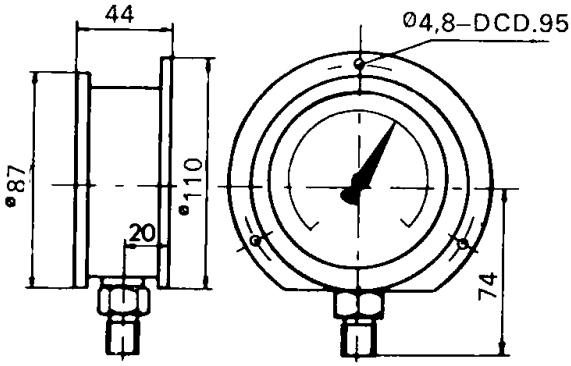

For refrigerants R22, R404A and R134a

M80-R49192	Discharge pressure –1 to 25 bar
+M80-3085	1/4“ flare connection
M80-R50079	Suction pressure –1 to 12 bar
+M80-3085	1/4“ flare connection
M80-00415-033	Oil pressure –1 to 12 bar
+M80-3085	1/4“ flare connection

Other refrigerants and pressure ranges on request.

Panel mounting with bottom connection, diameter 80 mm

Type 80M10-2

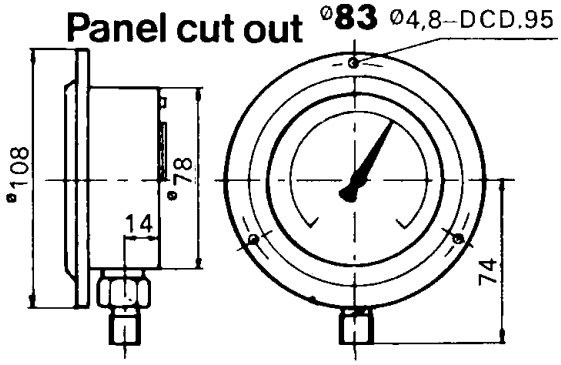

For refrigerants R22, R404A and R134a

M80-R49192	Discharge pressure –1 to 25 bar
+M80-660	1/4“ flare connection
M80-R50079	Suction pressure –1 to 12 bar
+M80-660	1/4“ flare connection
M80-00415-033	Oil pressure –1 to 12 bar
+M80-660	1/4“ flare connection

Other refrigerants and pressure ranges on request.

Panel mounting with rear connection, diameter 80 mm

Type 80M20-3

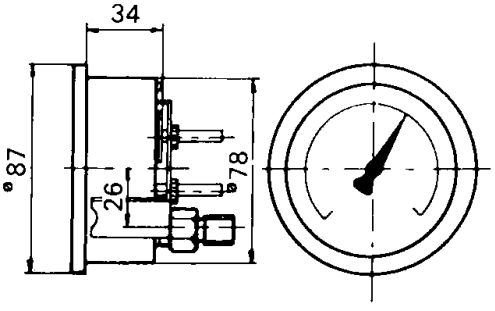

For refrigerants R22, R404A and R507

000657-001	Discharge pressure –1 to 25 bar
(OEM 1541.079-)	1/4“ flare connection
000416-063	Suction pressure –1 to 12 bar
(OEM 1541.078-)	1/4“ flare connection
000704-001	Suction and oil pressure –1 to12 +
(OEM 1541.082-)	0-4 bar, 1/4“ flare connection

Other refrigerants and pressure ranges on request.

Gleiwitzer Str. 14
D-25551 Hohenlockstedt
Tel.: +49 4826 8618-0
Fax.: +49 4826 8618-70
Email: info@att-spares.de
http://www.att-spares.de